

Specification:


BR-1022

- * 1" diameter press to fit
- * Suitable for steel door install
- * Self-locking
- * Standard 18" #22AWG leads
- * Special leads available
- * Switch and Magnet available separately
- * Resistor, Diode and Supervisory Loop available on request
- * Colors: White, Brown, Grey

... Recessed Mounted



Dimension (mm):

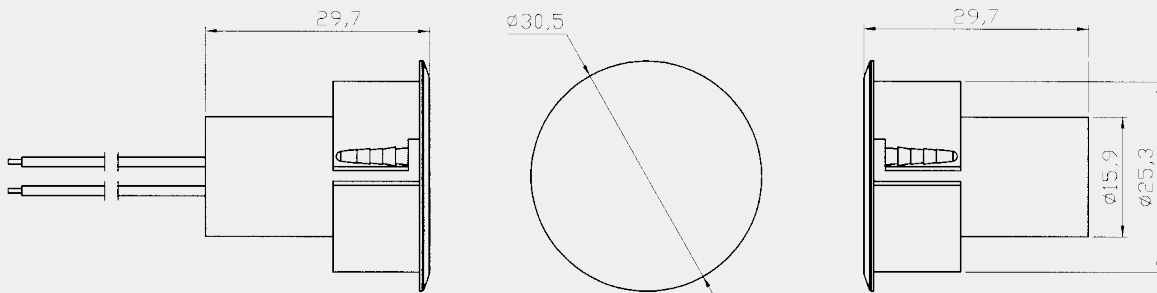

Order Information:

Part Number	Loop Type	Reed Form [Inch(mm)]	Closed Gap (in steel door) [Inch(mm)]	Depature Gap (in steel door) (Ohm)	Maximum Initial Contact Resistance (W)	Maximum Contact Rating (VDC/VAC)	Maximum Switching Voltage (A)	Maximum Switching Current
BR-1022	Closed	N/O	0.85 (22)	0.95 (24)	0.150	7.5	100	0.4
BR-1022WG	Closed	N/O	1 (26)	1.1 (28)	0.150	7.5	100	0.4
BR-1022A	Open	N/C	3/4 (19)		0.150	3	30	0.2
BR-1022C	Closed& Open	SPDT	3/4 (19)		0.150	3	30	0.2
BR-1022D	DPDT	2SPDT	3/4 (19)		0.150	3	30	0.2

Note: Gap will increase twice for installations other than steel

* These magnetic contact switches shall be installed so that a door or other movable opening cannot be opened more than 2 inches (51mm) without initiating an alarm. Switches exceeding 2 inches can not be installed per UL681-the Standard for installation and Classification of Burglar and Holdup Alarm